

# MOLYKOTE® P-1042 Adhesive Grease Paste

Reliable performance while withstanding washout by water and aggressive cooling fluids


## Meet performance needs

MOLYKOTE® P-1042 Adhesive Grease Paste offers:

- High load-carrying capacity
- Outstanding resistance to washout by water and metal-machining emulsions
- Tribo-corrosion avoidance
- Stick-slip prevention
- Excellent protection against galling

## High load-carrying capacity

DIN 51350 pt. 4 – 4-ball test machine

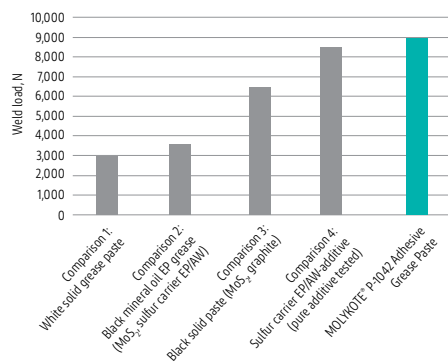

## Outstanding resistance to washout by water and metal-machining emulsions

As manufacturers use more aggressive cooling fluids in metal machinery and clamping mechanisms – such as lathe chucks – highly washout-resistant lubricants with reliable tribological performance are a requirement to reduce downtime and minimize relubrication cycles.

MOLYKOTE® P-1042 Adhesive Grease Paste is a light-colored grease-paste fortified with solid lubricants, designed for sliding surfaces exposed to high-pressure loadings and subjected to the influence of water or metal-machining emulsions. With a patented formula specifically designed to properly lubricate clamping mechanisms, MOLYKOTE® P-1042 Paste enables manufacturers to deliver consistent clamping force on lathe chucks. Additionally, MOLYKOTE® P-1042 Paste does not experience hardening issues during service.

## Static machining fluid compatibility test


Grease submerged in machining fluid emulsion at 23°C and occasionally stirred by hand to test whether it can be dissolved in the emulsion

Product	Before test	After 48 hr immersion in machining fluid	Result
Competitive product			Product partially dissolved
MOLYKOTE® P-1042 Adhesive Grease Paste			Excellent consistency retention



## Corrosion protection

Emcor corrosion protection test

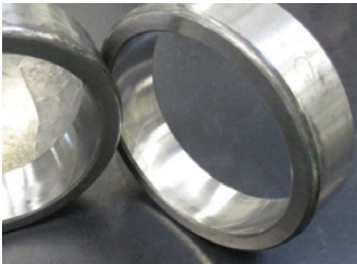


DIN 51802, 7 days, distilled water

**No corrosion**

## Water resistance


Water washout test



DIN 51807 pt. 2, 1 hr @ 80°C

**< 5 wt%**

Water emulsion test

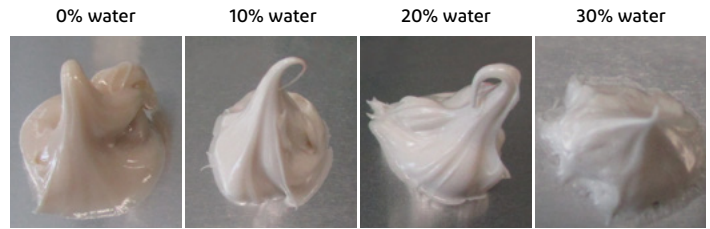

Amount of emulsified water, wt%	0	10	20	30	40
Micropenetration – ISO 2137, mm/10	73	71	70	74	Not possible – water not taken up entirely

**Able to absorb up to 30 wt% of water without loss of consistency**

## Typical properties

Specification writers: These values are not intended for use in preparing specifications. Please contact your local MOLYKOTE® sales representative prior to writing specifications on this product.

Standard	Test	Unit	Result
–	Appearance	–	Light beige
–	Base oil	–	Semi-synthetic
ISO 2137	Worked penetration	mm/10	285 to 320
DIN 51818	NLGI Class	–	1 to 2
ISO 2811	Density @ 20 °C	g/ml	1.28
ISO 2176	Drop point	°C	> 150
DIN 51807 pt. 1	Water resistance, static (90 °C, 3 hr)	–	0 to 90
DIN 51350 pt. 5	4-ball tester wear scar (under 800 N load)	mm	0.75
DIN 51350 pt. 4	4-ball tester weld load	N	9,000
–	Press-fit test	μ	0.1
–	Friction coefficient of bolt connection (M12x1.75, blackened 8.8 bolts)	μ head μ thread	0.12 0.11
DIN 51802	SKF-Emcor method, degree of corrosion	–	0 to 1

## About MOLYKOTE® Specialty Lubricants

For more than 70 years, customers around the world have trusted the MOLYKOTE® brand for performance and expertise to solve or prevent virtually any lubrication problem and to save energy. Available through a global network of more than 3,000 channel partners, MOLYKOTE® brand lubricants – which include well over 500 anti-friction coatings, compounds, dispersions, greases, oils and fluids, and pastes – serve the automotive market and industrial/maintenance, repair and overhaul (MRO) markets. To learn more about our extensive product and service offering or to locate a distributor, visit [molykote.com](http://molykote.com).



## Contact us

MOLYKOTE® has Contact Centers around the globe. Find the phone number for the center nearest you at [www.dupont.com/molykotecontact](http://www.dupont.com/molykotecontact).



DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.  
© 2020-2022 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

Form No. 01-1093-01-AGP0922

#16984